


Screw locking, top entry M32

Link til artikel

Produktet kan afvige fra billedet

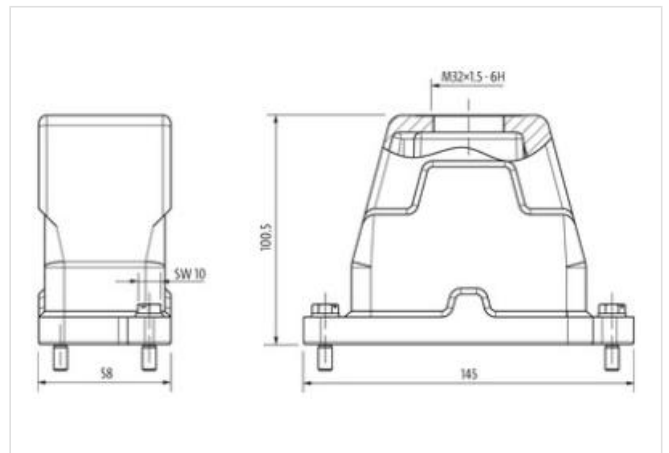

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4048879647380
Pakke-enhed	1

Cable outlet	straight
--------------	----------

Tightening torque	4 Nm
Mounting set	M32
Mating cycles min.	500

Degree of protection (EN IEC 60529)	IP68
Additional condition protection degree	inserted, locked, with screw connection

Housing type	Hood
--------------	------

Mechanical data Material data	
Coating housing	powder-coated
Material gasket	Silicon
Material housing	Aluminum die casting
Locking material	Stainless steel
Mechanical data Mounting data	
Size	B10
Mounting method	Screw locking
Height	100,5 mm
Width	58 mm
Depth	145 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	125 °C
Climatic category (EN IEC 60068-1)	40/125/21