


B16 Hood, high profile, IP67

Double locking lever, side entry M32

B16  
Hood (high)  
Double locking lever  
IP67  
Technical data will be only guaranteed with Murrelektronik components.

Link til artikel

Billede

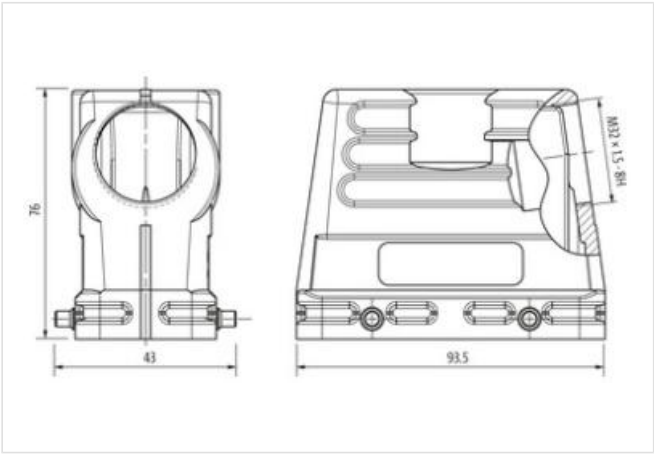

Produktet kan afvige fra billedet

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879653862 |
| Pakke-enhed           | 1             |

Installation

Cable outlet laterally

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M32 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP67                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

Housing type Hood

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B16 |
|------|-----|

|        |       |
|--------|-------|
| Height | 76 mm |
|--------|-------|

|       |       |
|-------|-------|
| Width | 43 mm |
|-------|-------|

|       |         |
|-------|---------|
| Depth | 93,5 mm |
|-------|---------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Double locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|