

B24 Hood, low profile, IP65

Single locking lever, top entry M32

B24

Hood (low)

Single locking lever

IP65


Technical data will be only guaranteed with Murrelektronik components.

Link til artikel

Billede



Produktet kan afvige fra billedet

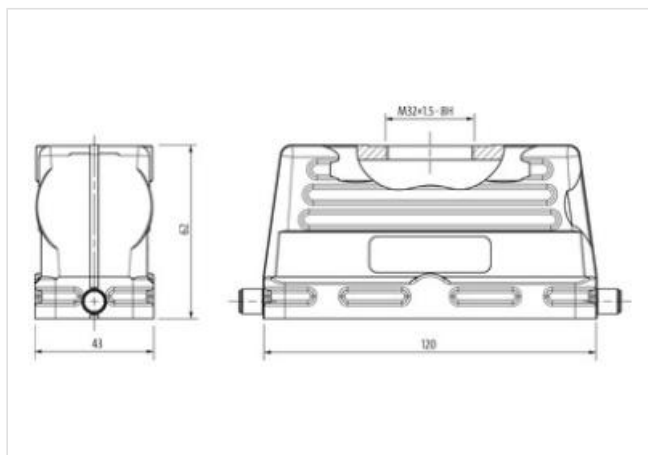

Commercial data

ECLASS-6.0	27143424
ECLASS-7.0	27440209
ECLASS-8.0	27440209
ECLASS-9.0	27440209
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4048879647120
Pakke-enhed	1

Installation

Cable outlet	straight
--------------	----------

Installation | Connection

Mounting set	M32
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type	Hood
Public housing	100%
Private housing	100%
Homeless	100%
Other	100%

Mechanical data | Material data

Coating housing powder-coated

Coating locking	verzinkt
Material housing	Aluminum die casting
Locking material	Steel

Mechanical data | Mounting data

Size	B24
Height	62 mm
Width	43 mm
Depth	120 mm
Looking techniques	Single locking lever

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21