


B24 Hood, IP68

Screw locking, side entry M50

B24
Hood
Protection IP68
Screw locking
Technical data will be only guaranteed with Murrelektronik components.

Link til artikel

Billede

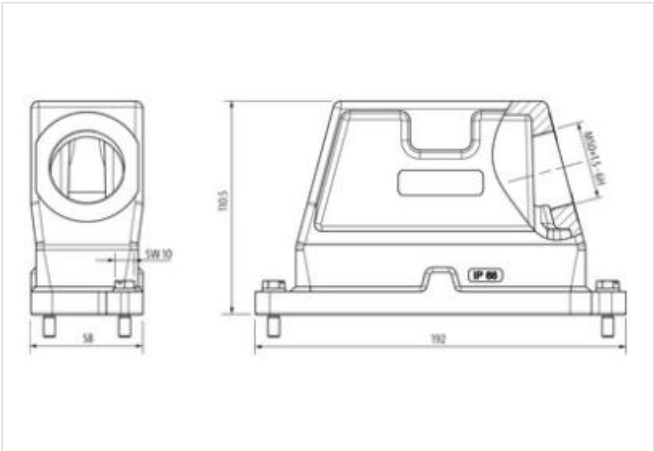

Produktet kan afvige fra billedet

Commercial data	
ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440209
ECLASS-8.0	27440209
ECLASS-9.0	27440209
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4065909051306
Pakke-enhed	1
Installation	
Cable outlet	laterally
Installation Connection	
Mounting set	M50
Mating cycles min.	500
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP68
Additional condition protection degree	inserted, locked, with screw connection
Mechanical data	
Housing type	Hood
Mechanical data Material data	

Coating housing	powder-coated
-----------------	---------------

Material gasket	Silicon
-----------------	---------

Material housing	Aluminum die casting
------------------	----------------------

Locking material	Stainless steel
------------------	-----------------

Mechanical data | Mounting data

Size	B24
------	-----

Mounting method	Screw locking
-----------------	---------------

Height	110,5 mm
--------	----------

Width	58 mm
-------	-------

Depth	192 mm
-------	--------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	125 °C
----------------------------	--------

Climatic category (EN IEC 60068-1)	40/125/21
------------------------------------	-----------