

# Mini (7/8) 4 pole, Male (Ext.) 0°/Female 0°

TPE 4x16AWG ye UL/CSA, TC-ER

Male straight – female straight

7/8" – 7/8", 4-pole

Power cable

USA





Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

## [Link til artikel](#)

### Billede

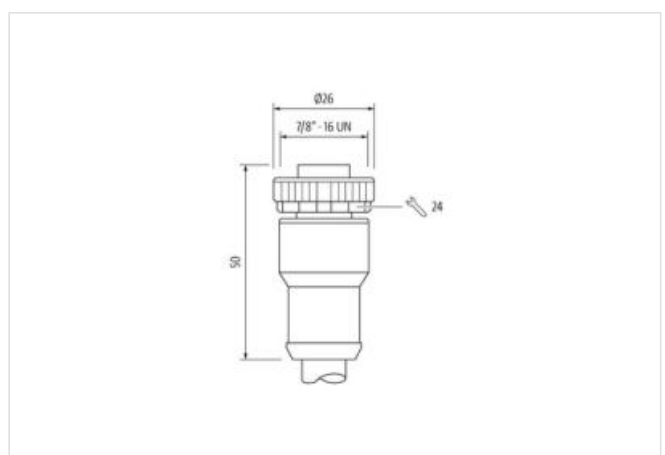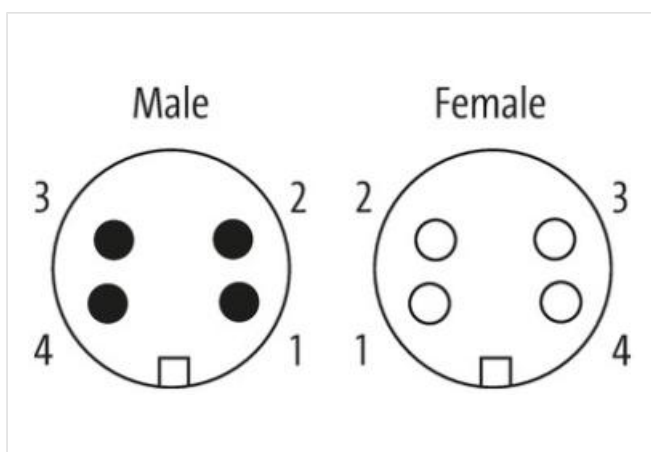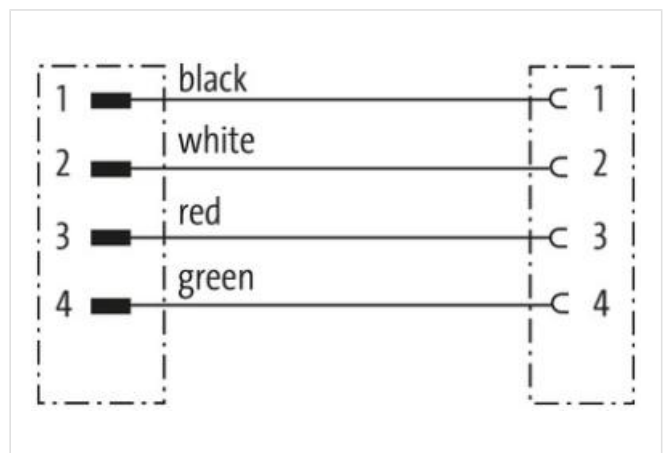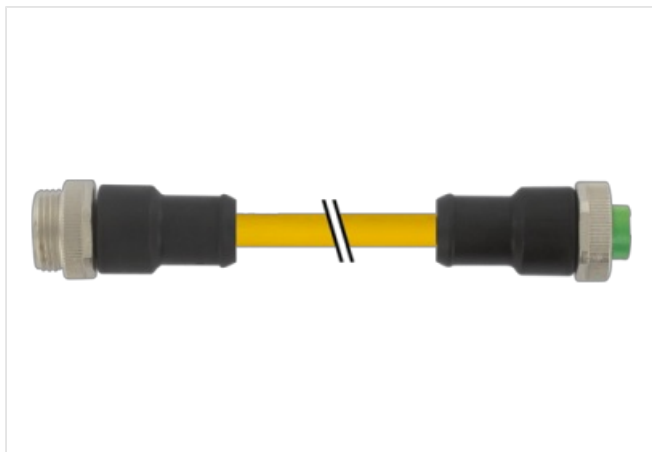



Produktet kan afvige fra billedet



|                                        |                   |
|----------------------------------------|-------------------|
| Cable length                           | 1,5 m             |
| Side 1                                 |                   |
| Tightening torque                      | 1,5 Nm            |
| Family construction form               | 7/8"              |
| Thread                                 | 7/8"              |
| Width across flats                     | SW24              |
| Side 2                                 |                   |
| Tightening torque                      | 1,5 Nm            |
| Thread                                 | 7/8"              |
| Commercial data                        |                   |
| ECLASS-6.0                             | 27279218          |
| ECLASS-7.0                             | 27279218          |
| ECLASS-8.0                             | 27279218          |
| ECLASS-9.0                             | 27060311          |
| ECLASS-10.1                            | 27060311          |
| ECLASS-11.1                            | 27060311          |
| ECLASS-12.0                            | 27060327          |
| ETIM-5.0                               | EC001855          |
| customs tariff number                  | 85444290          |
| GTIN                                   | 4048879698177     |
| Pakke-enhed                            | 1                 |
| Electrical data   Supply               |                   |
| Operating voltage AC max.              | 600 V             |
| Operating voltage DC max.              | 600 V             |
| Current operating per contact max.     | 9 A               |
| Device protection   Electrical         |                   |
| Degree of protection (EN IEC 60529)    | IP68              |
| Additional condition protection degree | inserted, screwed |
| Mechanical data   Material data        |                   |
| Coating locking                        | Nickeled          |
| Material housing                       | PUR               |

