

**MVP12-METALL, 4XM12, 5-POLE, PRE-WIRED CABLE**

15.0m PUR 16x0,34+3X0.75

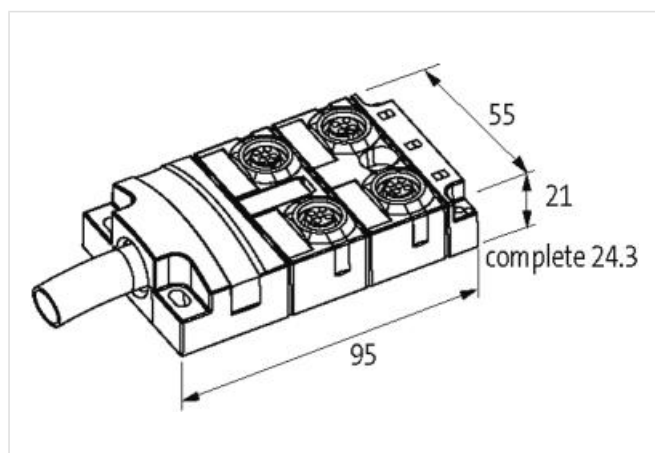
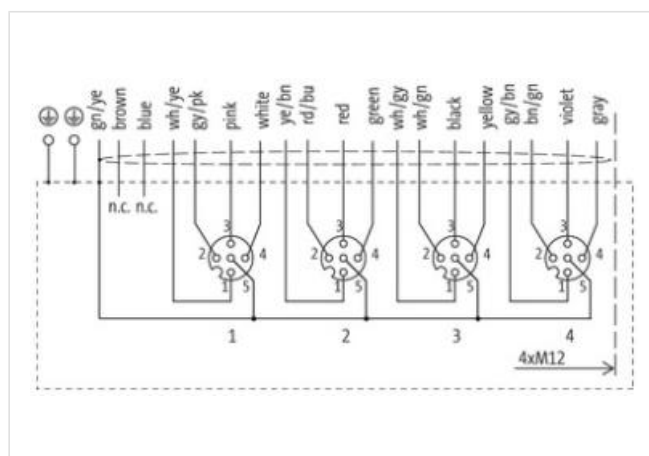
4-way UNIVERSAL, shielded

15.0 m

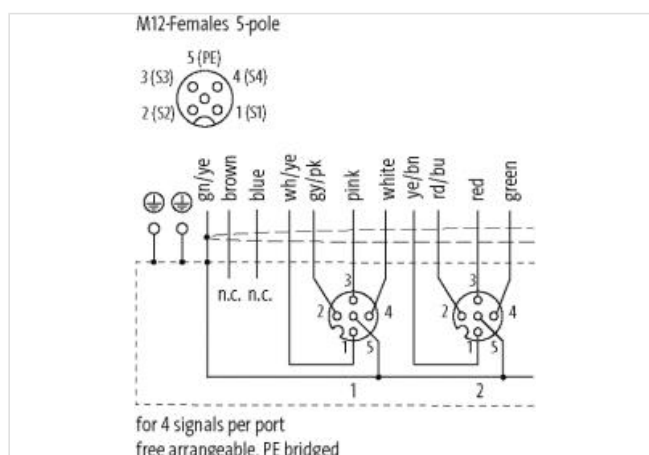
5-pole, with LED

Replaces identical product (Art.No. 27464)

Further cable lengths on request.

[Link til artikel](#)**Billede**

Produktet kan afvige fra billedet

**Commercial data**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27279219 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |
| ECLASS-8.0 | 27279219 |
| ECLASS-9.0 | 27440108 |

|                       |               |
|-----------------------|---------------|
| ECLASS-10.1           | 27440108      |
| ECLASS-11.1           | 27440108      |
| ECLASS-12.0           | 27440108      |
| ETIM-5.0              | EC002585      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879350594 |
| Pakke-enhed           | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 42 V |
| Operating voltage DC max.          | 42 V |
| Current operating per contact max. | 4 A  |

**Installation | Connection**

|              |         |
|--------------|---------|
| Mounting set | M12 x 1 |
|--------------|---------|

**Device protection | Electrical**

|                                     |                  |
|-------------------------------------|------------------|
| Degree of protection (EN IEC 60529) | IP65, IP67, IP68 |
|-------------------------------------|------------------|

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating housing  | Nickeled         |
| Material housing | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                |
|-----------------|----------------|
| Mounting method | Schraubgewinde |
|-----------------|----------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 90 °C                      |
| Additional condition temperature range | depending on cable quality |

**Installation | Cable**

|                                          |                                                                                                                                                                                      |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cable identification                     | 401                                                                                                                                                                                  |
| Jacket Color                             | gray                                                                                                                                                                                 |
| Type of Certificate                      | cURus                                                                                                                                                                                |
| Amount stranding                         | 1                                                                                                                                                                                    |
| Stranding                                | 3 wires twisted                                                                                                                                                                      |
| Stranding factor min.                    | 80 mm                                                                                                                                                                                |
| Stranding factor max.                    | 80 mm                                                                                                                                                                                |
| Amount stranding (type 2)                | 1                                                                                                                                                                                    |
| Stranding (type 2)                       | 16 wires around Stranding combination counter-rotating twisted                                                                                                                       |
| Stranding factor min. (type 2)           | 120 mm                                                                                                                                                                               |
| Stranding factor max. (type 2)           | 120 mm                                                                                                                                                                               |
| Cable shielding (type)                   | copper braid, tinned                                                                                                                                                                 |
| Cable shielding (coverage)               | 80 %                                                                                                                                                                                 |
| Banding                                  | Fleece                                                                                                                                                                               |
| wire arrangement                         | (gray-pink, violet, brown-gray, black, gray-white, red, brown-yellow, pink, yellow-white, gray, brown-green, yellow, green-white, green, red-blue, white), brown, blue, green-yellow |
| Cable weight                             | 237,6 g/m                                                                                                                                                                            |
| Material jacket                          | PUR                                                                                                                                                                                  |
| Shore hardness jacket                    | 94 ± 5 Shore A                                                                                                                                                                       |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free, LABS-free                                                                                                            |
| Outer-diameter (jacket)                  | 11,7 mm                                                                                                                                                                              |
| Tolerance outer diameter (sheath)        | ± 5 %                                                                                                                                                                                |
| Material wire insulation                 | PP                                                                                                                                                                                   |
| Amount wires                             | 3                                                                                                                                                                                    |
| Outer diameter insulation                | 2,6 mm                                                                                                                                                                               |
| Outer diameter tolerance core insulation | ± 5 %                                                                                                                                                                                |
| Shore hardness wire insulation           | 55 ± 5 Shore D                                                                                                                                                                       |

|                                                   |                                                                |
|---------------------------------------------------|----------------------------------------------------------------|
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Amount strands (wire)                             | 96                                                             |
| Diameter of single wires                          | 0,1 mm                                                         |
| Conductor crosssection (wire)                     | 0,75 mm <sup>2</sup>                                           |
| Traversing distance (C-track)                     | 1,8 m @ 25 °C   horizontal                                     |
| Material conductor wire                           | Stranded copper wire, bare                                     |
| Conductor type (wire)                             | strand class 6                                                 |
| Material wire insulation (Data)                   | PP                                                             |
| Outer diameter wire insulation (Data)             | 1,3 mm                                                         |
| Tolerance outer diameter wire insulation (data)   | ± 5 %                                                          |
| Shore hardness wire insulation (Data)             | 55 ± 5 Shore D                                                 |
| Ingredient freeness wire insulation (Data)        | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Amount wires (Data)                               | 16                                                             |
| Amount strands wire (Data)                        | 42                                                             |
| Diameter of single wires (Data)                   | 0,1 mm                                                         |
| Conductor crosssection wire (Data)                | 0,34 mm <sup>2</sup>                                           |
| Material conductor wire (Data)                    | Stranded copper wire, bare                                     |
| Wire conductor type (Data)                        | strand class 6                                                 |
| Max. rated voltage (conductor - conductor)        | 300 V                                                          |
| Max. rated voltage (conductor - ground)           | 300 V                                                          |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                              |
| Current load capacity min. wire                   | 12 A                                                           |
| Current load capacity min. Wire (Data)            | 4 A                                                            |
| Electrical resistance line constant wire          | 26 Ω/km @ 20 °C                                                |
| Electrical resistance coating wire (Data)         | 53 Ω/km @ 20 °C                                                |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                                    |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                                    |
| AC withstand voltage (wire - shield)              | 2 kV @ 60 s                                                    |
| Min. operating temperature (static)               | -40 °C                                                         |
| Max. operating temperature (fixed)                | 90 °C                                                          |
| Operating temperature min. (dynamic)              | -40 °C                                                         |
| Operating temperature max. (dynamic)              | 90 °C                                                          |
| Flame resistance                                  | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2            |
| chemical resistance                               | Good, application-related testing                              |
| Gasoline resistance                               | Good, application-related testing                              |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing           |
| Bending radius (installation)                     | x Outer diameter                                               |
| Bending radius (fixed)                            | 10 x Outer diameter                                            |
| Bending radius (dynamic)                          | 12 x Outer diameter                                            |
| Travel speed (C-track)                            | 5 Mio. @ 25 °C                                                 |

#### Connection type 2

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| No. of poles             | 19             |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 5              |
| PIN 1                    | S 1            |
| PIN 2                    | S 2            |
| PIN 3                    | S 3            |
| PIN 4                    | S 4            |

PIN 5

PE