

**EXACT12, 8XM12, 5-POLE, MOULDED CABLE**

5.0m PUR/PVC 16x0,34+3X0.75

8-way, 5-pole

PUR/PVC

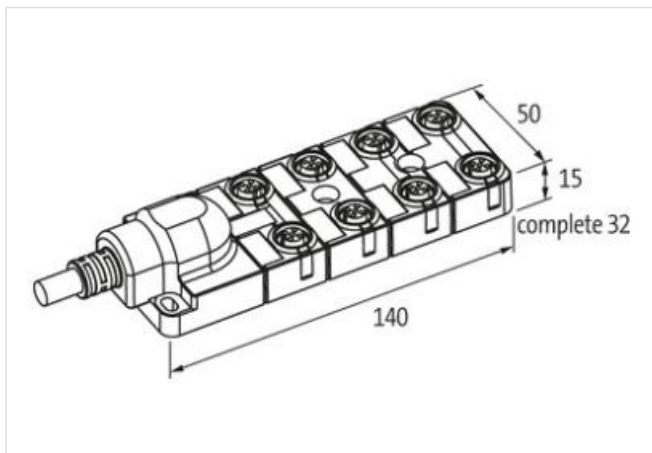
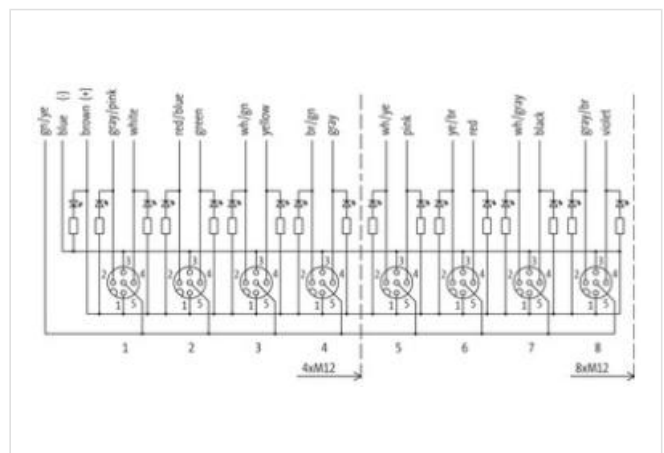
for NPN signals 24 V DC

5.0 m

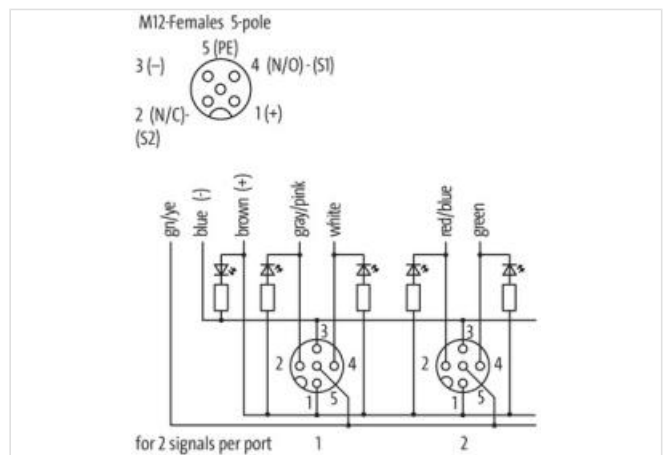
Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til artikel](#)**Billede**

Produktet kan afvige fra billedet

**Commercial data**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27143423 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |

|                       |               |
|-----------------------|---------------|
| ECLASS-8.0            | 27279219      |
| ECLASS-9.0            | 27440108      |
| ECLASS-10.1           | 27440108      |
| ECLASS-11.1           | 27440108      |
| ECLASS-12.0           | 27440108      |
| ETIM-5.0              | EC002585      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879053945 |
| Pakke-enhed           | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 4 A  |

**Installation | Connection**

|              |         |
|--------------|---------|
| Mounting set | M12 x 1 |
|--------------|---------|

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Mechanical data | Mounting data**

|                 |                |
|-----------------|----------------|
| Mounting method | Schraubgewinde |
|-----------------|----------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -20 °C                     |
| Operating temperature max.             | 70 °C                      |
| Additional condition temperature range | depending on cable quality |

**Installation | Cable**

|                                          |                                                                                                                                                                                      |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cable identification                     | 398                                                                                                                                                                                  |
| Cable Type                               | 2                                                                                                                                                                                    |
| Jacket Color                             | gray                                                                                                                                                                                 |
| Type of Certificate                      | cURus                                                                                                                                                                                |
| STOOW style jacket                       | Hybrid, Signal, Power                                                                                                                                                                |
| Amount stranding                         | 1                                                                                                                                                                                    |
| Stranding                                | 7 wires around Core filler twisted                                                                                                                                                   |
| Amount stranding (type 2)                | 1                                                                                                                                                                                    |
| Stranding (type 2)                       | 12 wires around Stranding combination twisted                                                                                                                                        |
| wire arrangement                         | white, gray-pink, brown-green, yellow, green-white, green, red-blue, (violet, brown-gray, black, gray-white, red, brown-yellow, pink, yellow-white, gray, blue, brown, green-yellow) |
| No. of bending cycles (C-track)          | 2 Mio. @ 25 °C                                                                                                                                                                       |
| Cable weight                             | 165 g/m                                                                                                                                                                              |
| Material jacket                          | PUR                                                                                                                                                                                  |
| Shore hardness jacket                    | 87 ± 5 Shore A                                                                                                                                                                       |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, silicone-free                                                                                                                                     |
| Outer-diameter (jacket)                  | 10 mm                                                                                                                                                                                |
| Tolerance outer diameter (sheath)        | ± 5 %                                                                                                                                                                                |
| Material inner jacket                    | PVC                                                                                                                                                                                  |
| Color (inner jacket)                     | gray                                                                                                                                                                                 |
| Material wire insulation                 | PVC                                                                                                                                                                                  |
| Amount wires                             | 16                                                                                                                                                                                   |
| Outer diameter insulation                | 1,3 mm                                                                                                                                                                               |
| Outer diameter tolerance core insulation | ± 5 %                                                                                                                                                                                |

|                                                         |                                                      |
|---------------------------------------------------------|------------------------------------------------------|
| Shore hardness wire insulation                          | 43 ± 5 Shore D                                       |
| Material properties wire insulation                     | good machinability                                   |
| Ingredient freeness wire insulation                     | lead-free, cadmium-free, CFC-free, silicone-free     |
| Amount strands (wire)                                   | 19                                                   |
| Diameter of single wires                                | 0,15 mm                                              |
| Conductor crosssection (wire)                           | 0,34 mm <sup>2</sup>                                 |
| Material conductor wire                                 | Stranded copper wire, bare                           |
| Conductor type (wire)                                   | Strand class 5                                       |
| Material wire insulation (Power)                        | PVC                                                  |
| Outer diameter wire insulation (Power)                  | 1,8 mm                                               |
| Tolerance outer diameter wire insulation (Power)        | ±5 %                                                 |
| Shore hardness wire insulation (Power)                  | 43±5 Shore D                                         |
| Material properties wire insulation (Power)             | good machinability                                   |
| Ingredient freeness wire insulation (Power)             | lead-free, cadmium-free, CFC-free, silicone-free     |
| Amount wires (Power)                                    | 3                                                    |
| Amount strands wire (Power)                             | 42                                                   |
| Diameter of single wires (Power)                        | 0,15 mm                                              |
| Wire conductor cross section (Power)                    | 0,75 mm <sup>2</sup>                                 |
| Material conductor wire (Power)                         | Stranded copper wire, bare                           |
| Conductor type wire (Power)                             | strand class 6                                       |
| Traversing distance (C-track)                           | 5 m @ 25 °C                                          |
| Current load capacity (standard)                        | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                         | 4 A                                                  |
| Electrical resistance line constant wire                | 57 Ω/km @ 20 °C                                      |
| Electrical resistance coating wire (Power)              | 26 Ω/km @20 °C                                       |
| Loop resistance                                         | 7,8 A                                                |
| Max. rated voltage power (conductor - ground)           | 300 V                                                |
| Max. rated voltage power (conductor - conductor)        | 300 V                                                |
| Power frequency withstand voltage power (wire - jacket) | 2 kV @ 60 s                                          |
| AC withstand voltage power (wire - wire)                | 2 kV @ 60 s                                          |
| Min. operating temperature (static)                     | -30 °C                                               |
| Max. operating temperature (fixed)                      | 80 °C                                                |
| Operating temperature min. (dynamic)                    | -5 °C                                                |
| Operating temperature max. (dynamic)                    | 70 °C                                                |
| Flame resistance                                        | IEC 60332-2-2   UL 1581 § 1090   UL 1581 § 1100 FT2  |
| chemical resistance                                     | Good, application-related testing                    |
| Gasoline resistance                                     | Good, application-related testing                    |
| Oil resistance                                          | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                                  | 5 x Outer diameter                                   |
| Bending radius (dynamic)                                | 10 x Outer diameter                                  |

#### Connection type 2

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| No. of poles             | 19             |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 5              |
| PIN 1                    | +              |
| PIN 2                    | NC S 2         |
| PIN 3                    | -              |
| PIN 4                    | NO S 1         |

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 28.04.2024

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

PIN 5

PE