



EXACT12 SAFETY, BACKSIDE SOLDERED SPRING TERM.

P1-4 M12 5-pol. LED, P5-8 M12 4/3-pol. 1:1 no LED


5-pole, 4/3-pole, potentially separated  
rear connection  
Spring clamp terminals  
with LED for digital PNP-signals 24 V DC (port 1...4)  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
flat gasket included

Link til artikel

Billede

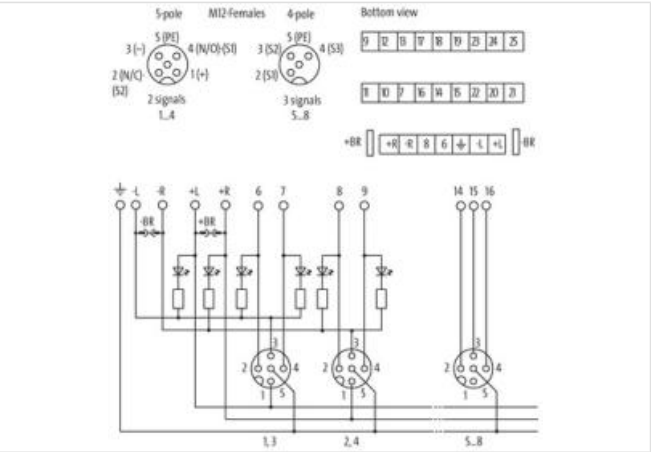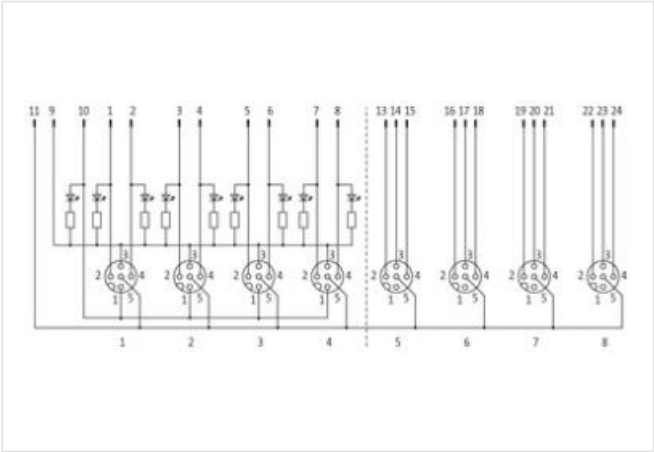

Produktet kan afvige fra billedet

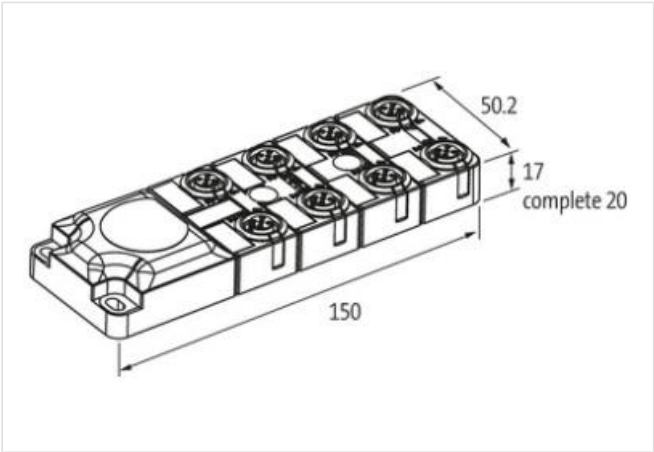

| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27143423 |
| ECLASS-6.1      | 27279219 |
| ECLASS-7.0      | 27279219 |

|                       |               |
|-----------------------|---------------|
| ECLASS-8.0            | 27279219      |
| ECLASS-9.0            | 27440111      |
| ECLASS-10.1           | 27440111      |
| ECLASS-11.1           | 27440111      |
| ECLASS-12.0           | 27440111      |
| ETIM-5.0              | EC002585      |
| customs tariff number | 85369010      |
| GTIN                  | 4048879315623 |
| Pakke-enhed           | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 4 A  |
| Total current max.                 | 8 A  |

**Installation | Connection**

|              |         |
|--------------|---------|
| Mounting set | M12 x 1 |
|--------------|---------|

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Mechanical data | Mounting data**

|                 |                |
|-----------------|----------------|
| Mounting method | Schraubgewinde |
|-----------------|----------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |

**Connection type 3**

|                          |         |
|--------------------------|---------|
| Family construction form | Cap     |
| No. of poles             | 25      |
| Family construction form | M12     |
| Gender                   | female  |
| Color contact carrier    | yellow  |
| Coding                   | A       |
| No. of poles             | 5       |
| PIN 1                    | n.c.    |
| PIN 2                    | S 2     |
| PIN 3                    | S 3     |
| PIN 4                    | S 4     |
| PIN 5                    | PE      |
| Family construction form | M12     |
| Gender                   | female  |
| Color contact carrier    | black   |
| Coding                   | A       |
| No. of poles             | 5       |
| PIN 1                    | 24 V DC |
| PIN 2                    | S 2     |
| PIN 3                    | 0 V     |
| PIN 4                    | S 1     |
| PIN 5                    | PE      |