

IMPACT67 COMPACT MODULE, PLASTIC

CANopen, 16 dig Out


Digital outputs  
DO16 - 0.5 A  
CAN 1 Mbit/s; M12, A-coded  
7/8", 5-pole, 2× max. 9 A  
M12, 5-pole, A-coded  
Connection cables are in the online shop under "Connection Technology".  
Housing fully potted.  
mounting compatible with I/O modules of the MVK series

Link to Product

Illustration



Product may differ from Image

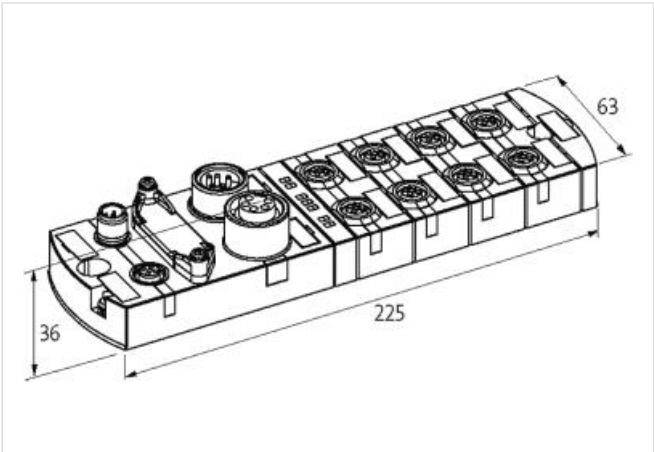

Commercial data	
ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ECLASS-10.1	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ETIM-5.0	EC001604
customs tariff number	85389099
GTIN	4048879052009
Packaging unit	1
Electrical data   Supply	
Total current UA max.	9 A
Total current US max.	9 A
Electrical data   Output	

Overload resistant	yes
Short-circuit protected	yes
Output current per pin max.	0,5 A
<b>Industrial communication   Bus data</b>	
Address range min.	1
Address range max.	99
<b>Industrial communication   CANopen</b>	
CANopen addressing	Rotary switch
<b>Diagnostics</b>	
Diagnostic	No voltage, Under voltage
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
LED display	Ethernet connection/data traffic
<b>Device protection   Electrical</b>	
Degree of protection (EN IEC 60529)	IP67
<b>Mechanical data   Mounting data</b>	
Suitable for mounting type	2-hole screw mounting
Height	39 mm
Width	63 mm
Depth	225 mm
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-25 °C
Operating temperature max.	70 °C
Storage temperature min.	-25 °C
Storage temperature max.	70 °C
<b>Connection type 5</b>	
Connection type 1	0-7
Connection type 2	Bus In
Connection type 3	Bus Out
Connection type 4	Power In
Connection type 5	Power Out
Family construction form	M12
Gender	female
Color contact carrier	gray
Coding	A
No. of poles	5
PIN 1	n.c.
PIN 2	DO 10-17
PIN 3	0 V
PIN 4	DO 00-07
PIN 5	PE
Family construction form	M12
Gender	male
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	PE
PIN 2	n.c.
PIN 3	CAN_PE
PIN 4	CAN_HIGH
PIN 5	CAN_LOW

Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	PE
PIN 2	n.c.
PIN 3	CAN_PE
PIN 4	CAN_HIGH
PIN 5	CAN_LOW
Family construction form	7/8"
Gender	male
Color contact carrier	black
No. of poles	5
PIN 1	0 V
PIN 2	0 V
PIN 3	PE
PIN 4	24 V DC (US)
PIN 5	24 V DC (UA)
Family construction form	7/8"
Gender	female
Color contact carrier	black
No. of poles	5
PIN 1	0 V
PIN 2	0 V
PIN 3	PE
PIN 4	24 V DC (US)
PIN 5	24 V DC (UA)