

T-Coupler MQ15 male / 2x MQ15 female

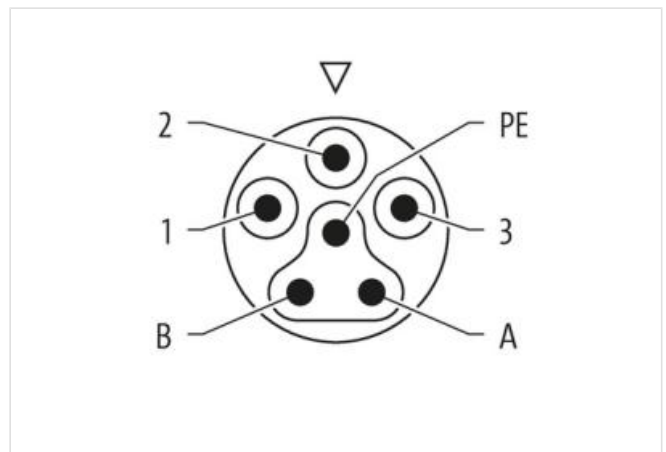
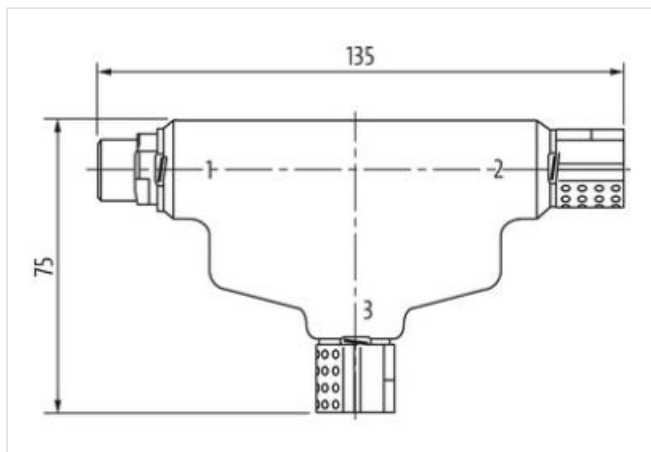
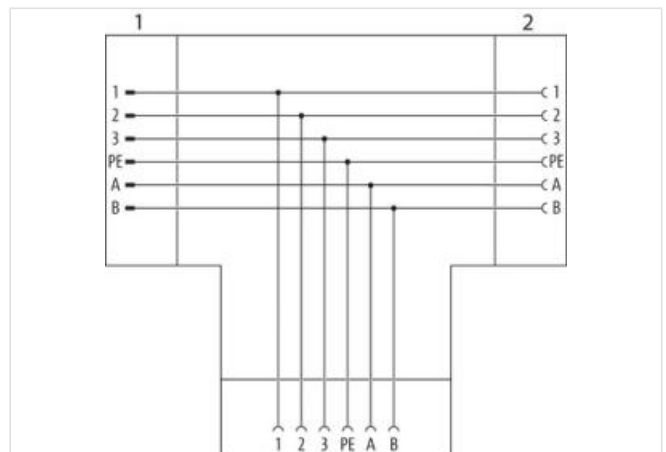
T-coupler

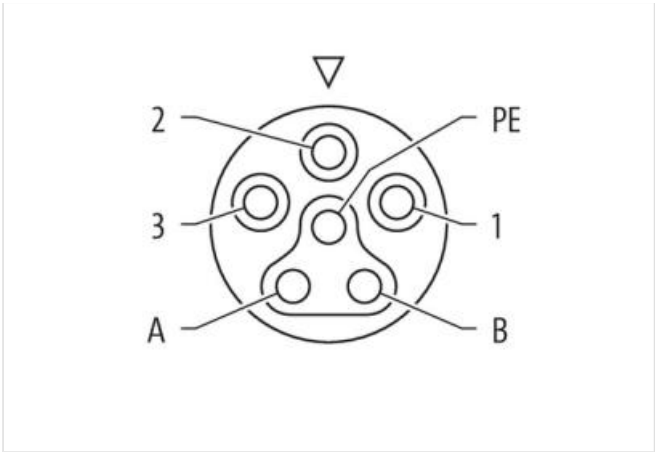
MQ15 X-Power

Female straight – female/male straight

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**



Product may differ from Image



Side 1

Family construction form	MQ15
No. of poles	6

Side 2

Family construction form	MQ15
No. of poles	6

Side 3

Family construction form	MQ15
No. of poles	6

Commercial data

ECLASS-6.0	27279220
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440106
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC002061
customs tariff number	85366990
GTIN	4048879798020
Packaging unit	1

Electrical data | Supply

Operating voltage AC per power contact max.	600 V
Operating voltage AC per signal contact max.	63 V
Operating voltage DC per signal contact max.	63 V
Operating current per power contact max.	16 A
Operating current per signal contact max.	10 A

Installation

Connection cross section max.	2,5 mm²
-------------------------------	---------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	2,5 kV
Mechanical data Material data	
Material gasket	NBR
Material housing	Plastic
Locking material	PA
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	90 °C