

M12 BULKHEAD FLANGE PLUGS 5 POLE A CODED V2A

Control cabinet entry system

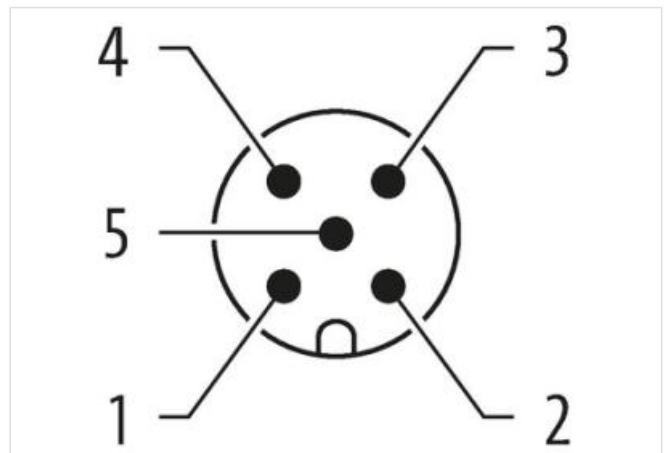
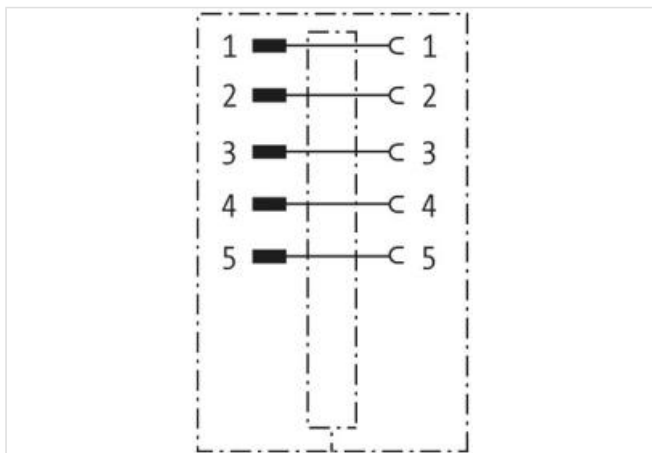
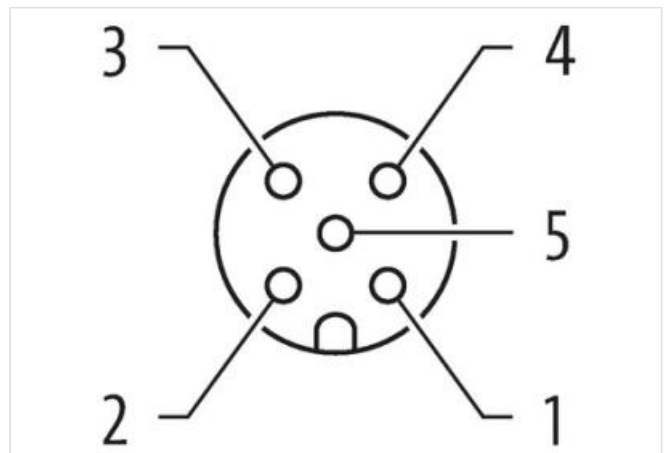
Male - female

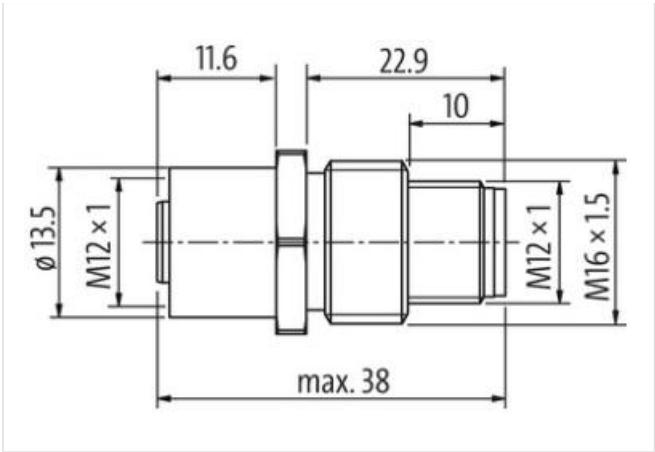
M12, 5-pole

A-coded

shielded

Stainless steel 1.4305 (V2A)

[Link to Product](#)**Illustration**



Product may differ from Image

| | |
|--|---|
| Side 1 | |
| Family construction form | M12 |
| Commercial data | |
| ECLASS-6.0 | 27279220 |
| ECLASS-7.0 | 27440103 |
| ECLASS-8.0 | 27440103 |
| ECLASS-9.0 | 27440103 |
| ECLASS-10.1 | 27440109 |
| ECLASS-11.1 | 27440109 |
| ECLASS-12.0 | 27440109 |
| ETIM-5.0 | EC001855 |
| customs tariff number | 85366990 |
| GTIN | 4048879314435 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage AC max. | 60 V |
| Operating voltage DC max. | 60 V |
| Current operating per contact max. | 4 A |
| Installation Connection | |
| Tightening torque | 0,6 Nm |
| Mounting set | M16 x 1.5 |
| Device protection Electrical | |
| Degree of protection (EN IEC 60529) | IP65, IP67, IP68, IP66K, IP69K |
| Additional condition protection degree | inserted, screwed |
| Mechanical data Material data | |
| Material housing | Stainless steel 1.4305 (V2A) |
| Mechanical data Mounting data | |
| Mounting method | inserted, screwed, Shaking protection |
| Environmental characteristics Climatic | |
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C |
| Important installation notes | |
| Note on strain relief | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |
| Note on bending radius | Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |